

FABCO-AIR

Pancake[®] II Air Cylinders

**Superior Interchangeable
Industrial Air Cylinders**



FABCO-AIR Pancake® II Cylinders

Product Index





Standard Series PSD, PSR, PSX, PWD, PTD

How it works	3
How to Order	5
Dimensions	6-9
Options	8,9
Weights	7
Repair kits	9

Nonrotating , Twin Rod Series PND

How it works	10
How to Order	11
Dimensions	12,13
Options	12,13
Weights	13
Repair kits	13

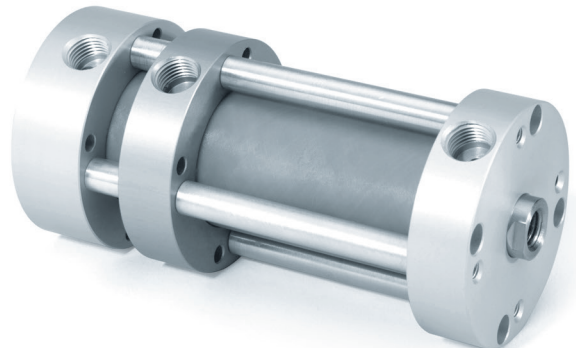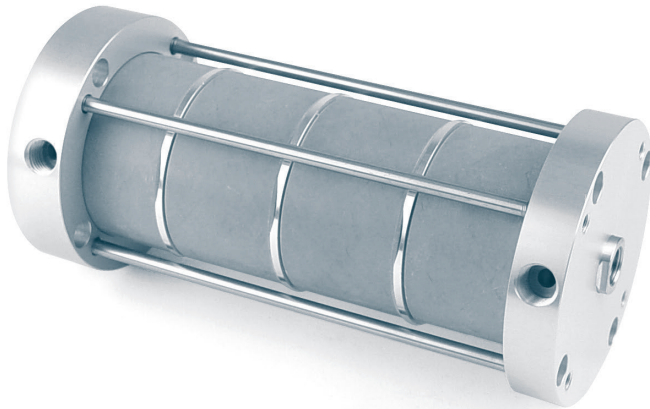

Multi-Power® Series PA and PB

How it works	14
How to Order	15
Dimensions	16,17
Options	17
Weights	17
Repair kits	17

3-Position Series P3D

How it works	18
How to Order	19
Dimensions	20,21
Options	20,21
Weights	21
Repair kits	21


Magnetic Position Sensing

Sensors	23
Quick disconnect cordsets	23

Accessories

All Series	22
------------------	----

The Pancake® II Direct Interchange Air Cylinders

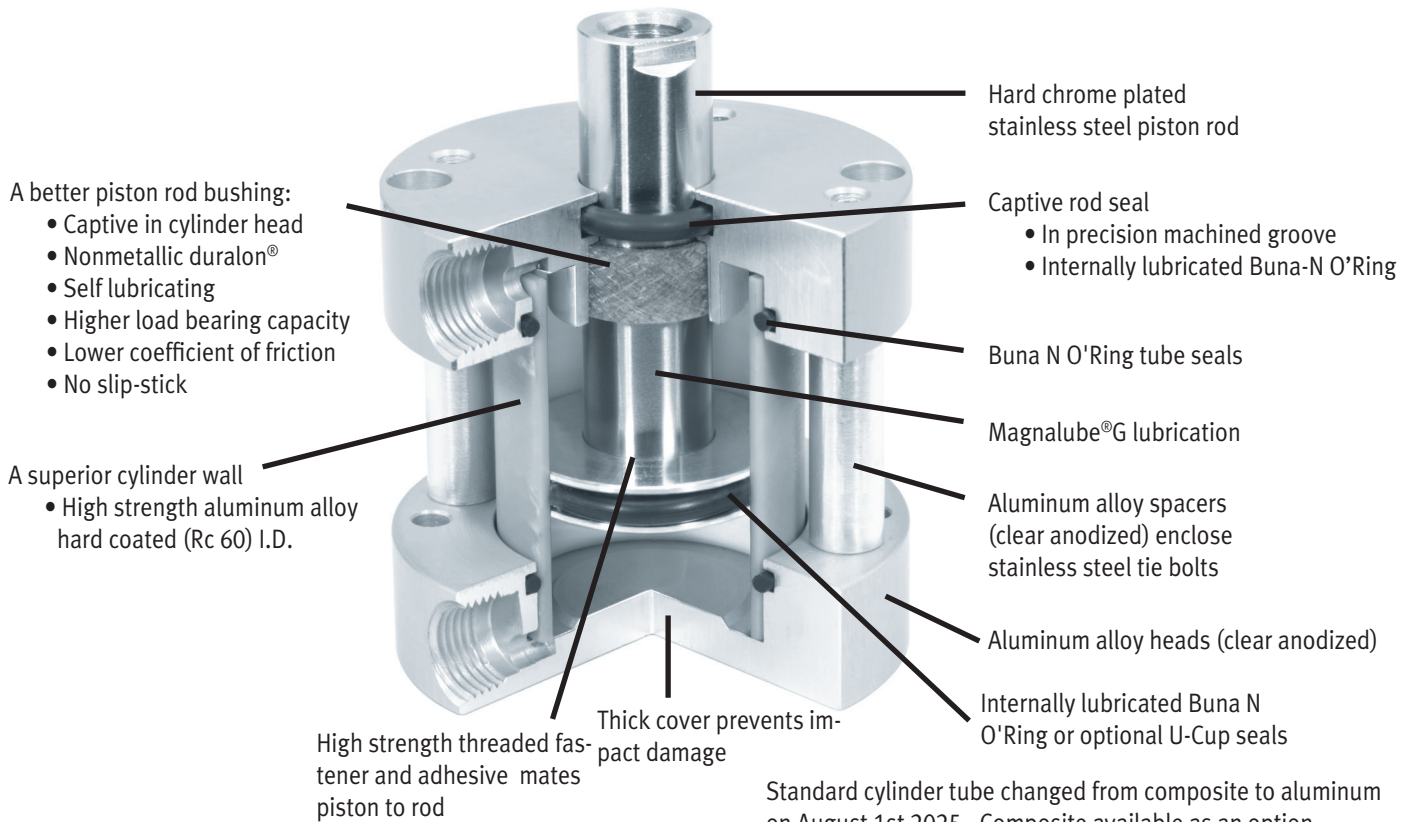

Standard cylinder tube changed from composite to aluminum on August 1st 2025 - Composite available as an option

Superior Interchangeable Industrial Air Cylinders

Innovation – For over 40 years our famous Pancakes® have dominated as the world's first compact air cylinder line. Today, backed by decades of engineering and manufacturing innovation, our new Pancake® II aluminum body air cylinders continue in the Pancake® tradition with a wide selection of models and options.

Packed with value – Stainless steel tie bolts and aluminum spacers lock precision machined heads tightly around a unique, high strength, aluminum cylinder barrel. The high strength aluminum alloy, hard coated (Rc 60) I.D. tube provides long life and superior performance. Combined with hard chrome plated stainless steel piston rods and a unique, nonmetallic rod bearing, the new Fabco-Air cylinder assembly assures optimal operation and longer product life.

Exceptional Piston Rod Bearing – The better the bearing, the more cycle life you can expect from your air cylinders. Pancake® II cylinders incorporate a truly superior rod bearing material - Duralon® with the same field-proven performance you have come to expect from the six other Fabco-Air cylinder families.

Duralon® is a composite of a Teflon®/Dacron® fabric liner

Duralon® Rod Bearings Excel


Machine Design 1972/73 Bearing Reference Issue	Load Capacity (psi)		Friction Properties	
			Coefficient	Slip-stick
Porous Bronze.....	4,500	Steel-on-steel.....	.50	Yes
Porous iron	8,000	Bronze-on-steel.....	.35	Yes
Phenolics	6,000	Sintered Bronze-on-steel		
Nylon®	1,000	with mineral oil13	No
TFE	500	Bronze-on-steel		
Reinforced Teflon® ...	2,500	with mineral oil16	No
*TFE fabric.....	60,000	Copper lead alloy-on-steel	.22	Yes
Polycarbonate.....	1,000	Acetal-on-steel.....	.20	No
Acetal.....	1,000	Nylon-on-steel32	Yes
Carbon-graphite	600	Duralon-on-steel.....	.05 - .16	No

* Shows Duralon bearing classification. Not to be used for design purposes.

Printed with permission by Rexnord Corp.

bonded to a supporting filament-wound, high strength, fiberglass and epoxy resin shell. Resistant to corrosion, moisture and temperature to 325°F, the bearing is reliable in any environment. It has an extremely high load bearing capacity, very low friction, and will not gall or score the piston rod (see physical properties in the table above).

How to Order

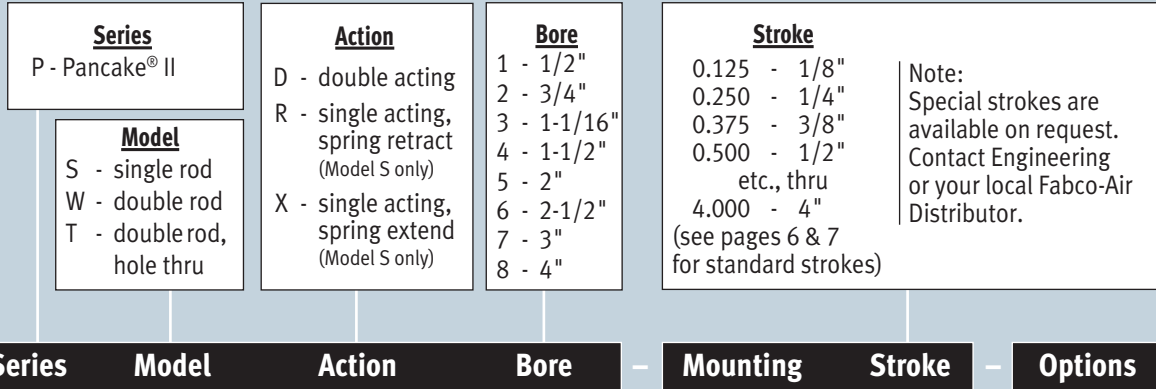

Mounting

Leave blank for standard counterbored mounting holes (see page 6) in the basic model. For other mounting specify only one option code.

- CB - Screw head clearance holes, both ends¹
- CF - Screw head clearance holes, front¹
- CR - Screw head clearance holes, rear¹
- F - Nose mount (all except double rod models)²
- HB - Threaded mounting holes, both ends
- HF - Threaded mounting holes, front
- HR - Threaded mounting holes, rear
- PM - Pivot mount, pin 90° from port
- SM - Pivot mount, pin in-line with port
- TB - Trunnion mount, both ends³
- TF - Trunnion mount, front³
- TR - Trunnion mount, rear³

- ¹ "Screw head clearance" to allow bolt head to pass through; No counter bores (see page 8)
² Includes heavy duty rear head and rod wiper
³ Not available in 1/2" bore.

How to Order

1. Specify P, Model, Action, and Bore
2. Specify optional Mounting (if required), then Stroke
3. Specify the Options in alphabetical order

Ordering example #1: PTD4-HF2.500-TCFV

Pancake® II with double rod hole thru, double acting, 1-1/2" bore, front threaded mounting holes, 2-1/2" stroke, coarse female rod thread, and Viton seals.

Ordering example #2: PSD3-1.000

Pancake® II with single rod, double acting, 1-1/16" bore, standard counterbored mounting holes and 1" stroke.

Options


Enter in alphabetical order

- B - Bumpers, both ends¹
- BF - Bumper, front only¹
- BR - Bumper, rear only¹
- CT - Composite Tube
- E - Magnet on piston for position sensing (see length adders page 9) 3/8" stroke minimum²
- H - Heavy duty rear head (see length adder page 9)
- J - Failsafe operation (single acting, spring retract models)³
- L - Low friction seals (see length adders page 9)
- P2, P3, P4 - Front port position other than standard⁴
- Q - Low temperature operation (-40°F to +200°F)
- TCF - Coarse female rod thread, dimension E (page 7)
- TCM - Male rod end with coarse thread (page 8)
- TFM - Male rod end with fine thread (page 8)
- TN - Non-threaded rod
- T1, T3, T4 - Additional adhesive mounted dovetail extrusions located in position 1, 3, or 4
- V - Viton seals for media compatibility (-15°F to +221°F)
- W - Rod wiper, Buna N only (page 8)
- X - EXTRA rod extension
Example: X0.5 = 1/2" EXTRA Rod Extension
X1 = 1" EXTRA Rod Extension

- ¹ Stroke is reduced by .03 per end; .06 for option B; Spring retracted, BR only; Spring extended, BF only.
² Not available with Viton seals or low temperature seals.
³ Not available in 1/2" bore.
⁴ P2 and P4 not available in 1/2" bore.

FABCO-AIR Pancake® II Cylinders

Model PSD Double Acting, Single Rod

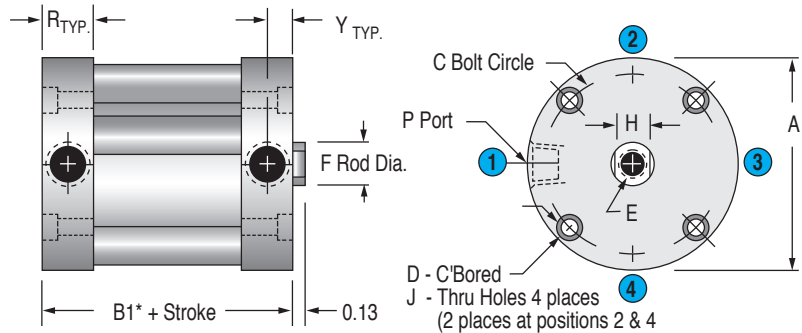


***Note: Some options effect cylinder length**

Standard Strokes – All Models: • 1/8 • 1/4 • 3/8 • 1/2 • 5/8 • 3/4 • 7/8 • 1 • 1-1/4 • 1-1/2 • 1-3/4 • 2 • 2-1/2 • 3 • 3-1/2 • 4
Special strokes available on request. Contact Engineering or your local Fabco-Air Distributor

Model PWD Double Acting, Double Rod Model PTD Double Acting, Hole Thru Double Rod

Hole Thru Diameter (PTD)		
Bore	Female Rod Thread	Male Rod Thread
1/2 (1)	N/A	N/A
3/4 (2)	0.14	0.09
1-1/16 (3)	0.22	0.16
1-1/2 (4)	0.28	0.19
2 (5)	0.38	0.25
2-1/2 (6)	0.38	0.25
3 (7)	0.44	0.31
4 (8)	0.50	0.38

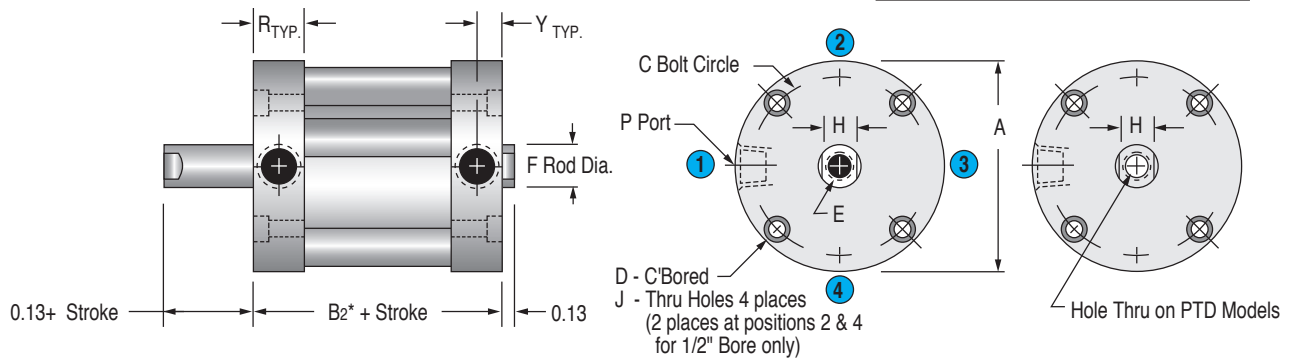

***Note: Some options effect cylinder length**


Dimensions (inches)

Bore	A	B1*	B2*	B3* for Stroke Range				B4* for Stroke Range				C	D C'Bore
				0-1	1.001-2	2.001-3	3.001-4	0-1	1.001-2	2.001-3	3.001-4		
1/2 (1)	1.12	0.56	0.69	0.81	1.38	1.96	2.52	1.06	1.62	2.14	3.21	0.88	0.20 x 0.13 dp
3/4 (2)	1.49	0.56	0.69	0.81	1.38	1.94	2.50	1.06	1.62	2.19	2.75	1.22	0.24 x 0.15 dp
1-1/16 (3)	1.99	0.88	0.94	0.88	1.50	2.13	2.75	1.38	2.00	2.63	3.25	1.69	0.24 x 0.15 dp
1-1/2 (4)	2.62	0.88	1.00	0.88	1.50	2.13	2.75	1.38	2.00	2.63	3.25	2.19	0.34 x 0.22 dp
2 (5)	3.12	0.94	1.06	0.94	1.56	2.19	2.81	1.44	2.06	2.69	NA	2.69	0.34 x 0.22 dp
2-1/2 (6)	3.75	1.19	1.31	1.19	2.06	2.94	3.81	1.94	2.81	2.81	NA	3.25	0.40 x 0.27 dp
3 (7)	4.25	1.25	1.38	1.25	2.12	3.00	3.88	2.00	2.88	2.88	NA	3.78	0.40 x 0.27 dp
4 (8)	5.50	1.56	1.69	1.56	2.44	3.31	4.19	2.31	3.19	3.19	NA	4.94	0.49 x 0.33 dp

Standard Series PSD, PSR, PSX, PWD, PTD Basic Dimensions

Model PSR Single Acting, Spring Retract

See table on page 4
for spring forces

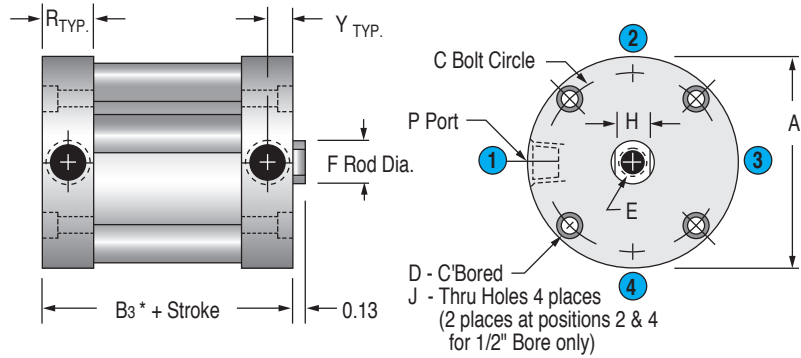


***Note: Some options effect cylinder length**

Standard Strokes – All Models: • 1/8 • 1/4 • 3/8 • 1/2 • 5/8 • 3/4 • 7/8 • 1 • 1-1/4 • 1-1/2 • 1-3/4 • 2 • 2-1/2 • 3 • 3-1/2 • 4
Special strokes available on request. Contact Engineering or your local Fabco-Air Distributor

Model PSX Reverse Acting, Spring Extend

See table on page 4
for spring forces

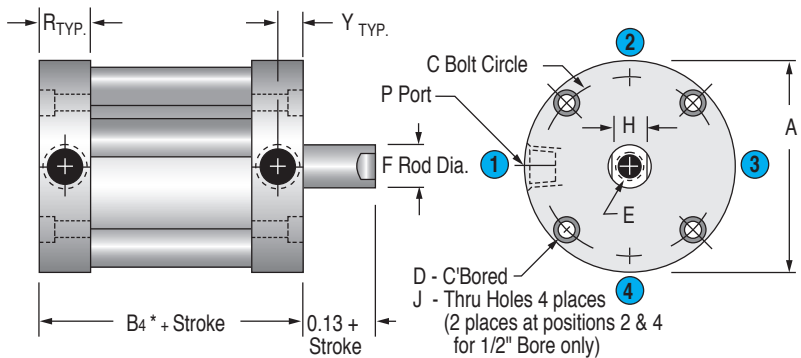

***Note: Some options effect cylinder length**

Approximate Cylinder Weights (ounces) PSD, PSR, PWD, PTD, PSX

Bore	PSD, PSR		PWD, PTD		PSX		Nose Mount Option	
	Base	Adder per 1/8 of Stroke	Base	Adder per 1/8 of Stroke Model PWD	Adder per 1/8 of Stroke for Model PTD	Base	Adder per 1/8 of Stroke	Adder to Base Weight
1/2 (1)	1.15	.06	1.26	N/A	N/A	1.25	.06	0.1
3/4 (2)	1.82	.08	2.03	.18	.13	1.92	.08	0.2
1-1/16 (3)	4.70	.24	5.61	.37	.25	5.09	.24	1.1
1-1/2 (4)	9.22	.32	10.84	.55	.42	10.08	.32	1.8
2 (5)	12.48	.40	14.71	.64	.50	13.44	.40	2.7
2-1/2 (6)	21.50	.48	27.10	.74	.59	24.00	.48	3.1
3 (7)	27.74	.64	36.78	1.01	.76	31.20	.64	3.5
4 (8)	53.47	.80	69.50	1.20	.92	59.33	.80	5.9

Dimensions (inches)


Bore	E Standard	E Coarse	E Depth for Stroke Range		F	H	J Hole	P Port	R	Y
			1/8 - 1/2	5/8 +						
1/2 (1)	#8-32 UNF	N/A	0.30-0.46	0.46	0.25	0.22	0.13	#10-32 UNF	0.34	0.14
3/4 (2)	#10-32 UNF	#10-24 UNC	0.30-0.46	0.46	0.31	0.25	0.15	#10-32 UNF	0.34	0.14
1-1/16 (3)	5/16-24 UNF	5/16-18 UNC	0.37-0.63	0.70	0.50	0.44	0.15	1/8 NPT	0.50	0.25
1-1/2 (4)	3/8-24 UNF	3/8-16 UNC	0.37-0.70	0.70	0.63	0.50	0.20	1/8 NPT	0.50	0.25
2 (5)	1/2-20 UNF	1/2-13 UNC	0.30-0.63	0.70	0.75	0.63	0.20	1/8 NPT	0.53	0.25
2-1/2 (6)	1/2-20 UNF	1/2-13 UNC	0.42-0.70	0.70	0.75	0.63	0.26	1/4 NPT	0.66	0.33
3 (7)	5/8-18 UNF	5/8-11 UNC	0.45-0.73	0.73	0.88	0.75	0.26	1/4 NPT	0.69	0.33
4 (8)	3/4-16 UNF	3/4-10 UNC	0.40-0.70	0.80	1.00	0.88	0.33	3/8 NPT	0.84	0.42

Please visit <http://portal.fabco-air.com/configure.php> for current pricing.
Specifications and prices subject to change without notice or incurring obligation

FABCO-AIR Pancake® II Cylinders


Model Options

Male Rod Ends
(Option TCM or TFM)



Thread Sizes			
Bore	E Thread		LT
	TCM (Coarse)	TFM (Fine)	
1/2 (1)	N/A	#8-32 UNC	0.38
3/4 (2)	#10-24 UNC	#10-32 UNF	0.38
1-1/16 (3)	5/16-18 UNC	5/16-24 UNF	0.50
1-1/2 (4)	3/8-16 UNC	3/8-24 UNF	0.50
2 (5)	1/2-13 UNC	1/2-20 UNF	0.63
2-1/2 (6)	1/2-13 UNC	1/2-20 UNF	0.63
3 (7)	5/8-11 UNC	5/8-18 UNF	0.75
4 (8)	3/4-10 UNC	3/4-16 UNF	0.75

Rod Wiper
(Option W)
Buna-N only




Boss Dia.	
Bore	BD
1/2 (1)	0.56
3/4 (2)	0.69
1-1/16 (3)	0.88
1-1/2 (4)	1.00
2 (5)	1.13
2-1/2 (6)	1.13
3 (7)	1.25
4 (8)	1.38

Mounting Options


Pivot Mount

Complete with bronze pivot bushing.
Not available as an accessory. (SM shown)

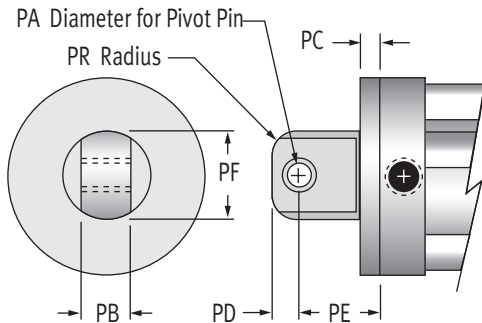


Screw Head Clearance Holes

Available either or both ends.
(CR shown)



Trunnion Mount

Available rear, front or both.
Not available on 1/2" bore.
(TF shown solid)

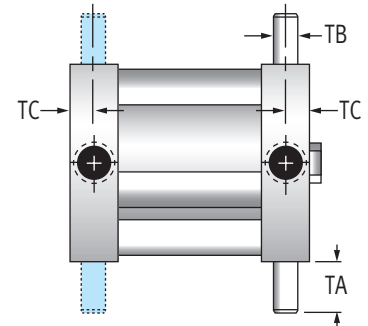

Dimensions (inches)

Bore	PA	PB	PC	PD	PE	PF	PR	SC	TA	TB	TC
1/2 (1)	0.19	0.38	0.19	0.25	0.75	0.63	0.19	0.17	NA	NA	NA
3/4 (2)	0.19	0.38	0.19	0.25	0.75	0.75	0.19	0.23	0.31	0.125	0.17
1-1/16 (3)	0.19	0.38	0.25	0.25	0.81	0.75	0.19	0.25	0.50	0.250	0.25
1-1/2 (4)	0.38	0.75	0.25	0.44	1.19	1.38	0.38	0.34	0.50	0.250	0.25
2 (5)	0.38	0.75	0.31	0.44	1.25	1.38	0.38	0.34	0.50	0.250	0.25
2-1/2 (6)	0.38	0.75	0.38	0.44	1.31	1.38	0.38	0.41	0.63	0.312	0.33
3 (7)	0.63	1.00	0.38	0.56	1.69	1.88	0.38	0.41	0.63	0.312	0.33
4 (8)	0.63	1.00	0.44	0.56	1.75	1.88	0.38	0.50	0.75	0.375	0.42

Series PSD, PSR, PSX, PWD, PTD Option Dimensions

Seal Kits – Series PSD, PSR, PSX, PWD, PTD

Options	Kit Numbers by Bore Size							
	1/2"	3/4"	1-1/16"	1-1/2"	2"	2-1/2"	3"	4"
Standard	PS-1-SK	PS-2-SK	PS-3-SK	PS-4-SK	PS-5-SK	PS-6-SK	PS-7-SK	PS-8-SK
Viton (V)	PS-1-SKV	PS-2-SKV	PS-3-SKV	PS-4-SKV	PS-5-SKV	PS-6-SKV	PS-7-SKV	PS-8-SKV
Low Temperature (Q)	PS-1-SKQ	PS-2-SKQ	PS-3-SKQ	PS-4-SKQ	PS-5-SKQ	PS-6-SKQ	PS-7-SKQ	PS-8-SKQ
Low Friction (L)	PS-1-SKL	PS-2-SKL	PS-3-SKL	PS-4-SKL	PS-5-SKL	PS-6-SKL	PS-7-SKL	PS-8-SKL
Low Friction-Viton (L, V)	PS-1-SKLV	PS-2-SKLV	PS-3-SKLV	PS-4-SKLV	PS-5-SKLV	PS-6-SKLV	PS-7-SKLV	PS-8-SKLV
Low Friction-Low Temperature (L, Q)	PS-1-SKLQ	PS-2-SKLQ	PS-3-SKLQ	PS-4-SKLQ	PS-5-SKLQ	PS-6-SKLQ	PS-7-SKLQ	PS-8-SKLQ

Deviations from Standard Dimensions (Options L, H, E)


*Heavy duty rear head is recommended for applications where the cylinder is mounted on the front face or trunnion-mounted, and impact loading (20 or more cycles/minute) occurs between the piston and rear head. It increases the overall length of the cylinder as shown.

**A minimum stroke of 3/8" is required to sense end-of-stroke positions. For low friction seals used in conjunction with magnetic position sensing, use "E" length adder only.


Bore	Length Adder (inches)				
	Low Friction Seals (L)	Heavy Duty Rear Head* (H)	Magnetic Position Sensing** (E)		
			PSD, PWD, PTD	PSR	PSX
1/2 (1)	0.25	0.13	0.88	0.63	0.38
3/4 (2)	0.25	0.13	0.88	0.88	0.88
1-1/16 (3)	0.38	0.19	0.88	0.88	0.88
1-1/2 (4)	0.38	0.19	0.88	0.88	0.88
2 (5)	0.38	0.19	0.88	0.88	0.88
2-1/2 (6)	0.38	0.25	0.88	0.88	0.88
3 (7)	0.50	0.25	0.88	0.88	0.88
4 (8)	0.50	0.38	0.88	0.88	0.88

Threaded Mounting Holes Available either or both ends.

1/2" Bore (HR shown)

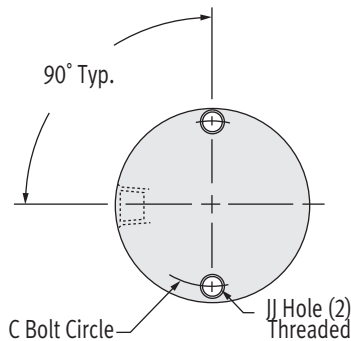


3/4" Bore & Up

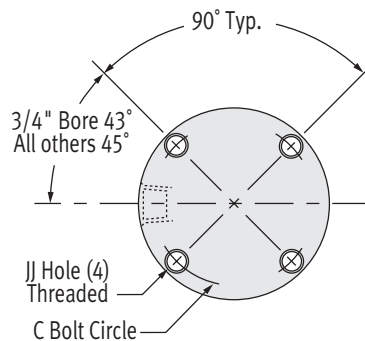

Nose Mount

Available on PSD, PSR, and PSX. (F shown) Includes rod wiper and heavy duty rear head. See length adder above.

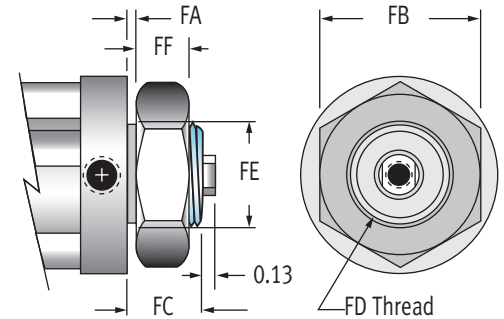

Dimensions (inches)								
Bore	C	JJ	FA	FB	FC	FD	FE	FF
1/2 (1)	0.88	#4 – 40 UNC	.06	0.75 Hex	.38	1/2 – 20 UNF-2A	.50	.31
3/4 (2)	1.22	#6 – 32 UNC	.06	0.75 Hex	.38	5/8 – 18 UNF-2A	.62	.25
1-1/16 (3)	1.69	#6 – 32 UNC	.13	1.50 Hex	.75	1 – 14 UNF-2A	1.00	.55
1-1/2 (4)	2.19	#10 – 24 UNC	.13	1.88 Hex	.75	1-1/4 – 12 UNF-2A	1.25	.52
2 (5)	2.69	#10 – 24 UNC	.19	1.88 Hex	.88	1-3/8 – 12 UNF-2A	1.38	.52
2-1/2 (6)	3.25	1/4 – 20 UNC	.25	1.88 Hex	1.00	1-3/8 – 12 UNF-2A	1.38	.52
3 (7)	3.78	1/4 – 20 UNC	.25	1.88 Hex	1.00	1-3/8 – 12 UNF-2A	1.38	.52
4 (8)	4.94	5/16 – 18 UNC	.19	2.62 Hex	1.12	1-3/4 – 12 UN-2A	1.75	.88

Maximum Torque for Nose Mount Option

Bore	Foot-Pounds
1/2 (1)	12
3/4 (2)	28
1-1/16 (3)	100
1-1/2 (4)	120
2 (5)	130
2-1/2 (6)	130
3 (7)	130
4 (8)	150

FABCO-AIR Pancake® II Cylinders

Nonrotating, double acting 4 Bore sizes 3/4" thru 2" Strokes to 4" standard





Twin piston rods are incorporated into the cylinder head to achieve NON-ROTATION. The rods are securely fastened to the piston and tied together externally by a rod end tool bar. The tool bar insures that the rods move in tandem and provides an ideal mounting surface for any attachments required by your application. The tool bar is furnished with threaded mounting holes or optional counter-bored mounting holes.

Ratings – Standard Units all Series

- Body.....High strength aluminum alloy
- Heads..... Clear anodized aluminum alloy
- Tie Bolts..... Stainless steel
- Rod.....Chrome plated stainless steel
- Piston..... Stainless steel
- Rod end.....Tool bar
- Ports..... Position #1
- Seals..... Internally lubricated Buna-N
- Lubrication..... Magnalube®-G
- Rod bushing.....Bronze
- Stroke tolerance.....± 1/64"
- Media..... Air
- Pressure rating, maximum..... 200 psi
- Minimum recommended operating pressure..... 15 psi
- Temperature rating Cylinder.....-25° to +221°F (-32° to +105°C)
- Temperature rating Electronic sensors.....-4° to +176°F (-20° to +80°C)

Allowable Torsion Load and Rotational Tolerance

Side loading should be avoided for any cylinder application. The smaller diameter twin rods will have more deflection due to side load than the one standard rod in a comparable Pancake® II cylinder. However, the PND Series is designed to work satisfactorily against pure torsional loads. Maximum torsional load per bore size is shown in the following table.



Approximate Angular Deflection (Degrees) due to max. torsional load							
Bore	Torsional Load Max.	Stroke					
		0 to 1-1/2	2	2-1/2	3	3-1/2	4
3/4	0.3 in-lbs	less than 0.22	0.51	0.98	1.67	2.62	3.88
1-1/16	1.0 in-lbs	less than 0.15	0.33	0.64	1.09	1.71	2.53
1-1/2	5.0 in-lbs	less than 0.08	0.18	0.36	0.61	0.95	1.41
2	10.0 in-lbs	less than 0.03	0.07	0.13	0.22	0.34	0.50


Freeplay Rotational Tolerance				
Bore	3/4" (2)	1-1/16" (3)	1-1/2" (4)	2" (5)
Max. Rotation	±1°	±3/4°	±1/2°	±1/2°

Cylinder Sizing Guide

Bore Diameter (inch)	3/4	1-1/16	1-1/2	2
Rod Diameter (inch)	0.19	0.25	0.38	0.50
Rod Area (in ²)	0.05	0.10	0.22	0.38
Push Area (in ²)	0.44	0.88	1.76	3.14
Pull Area (in ²)	0.39	0.78	1.54	2.76

Please visit <http://portal.fabco-air.com/configure.php> for current pricing. Specifications and prices subject to change without notice or incurring obligation

How to Order

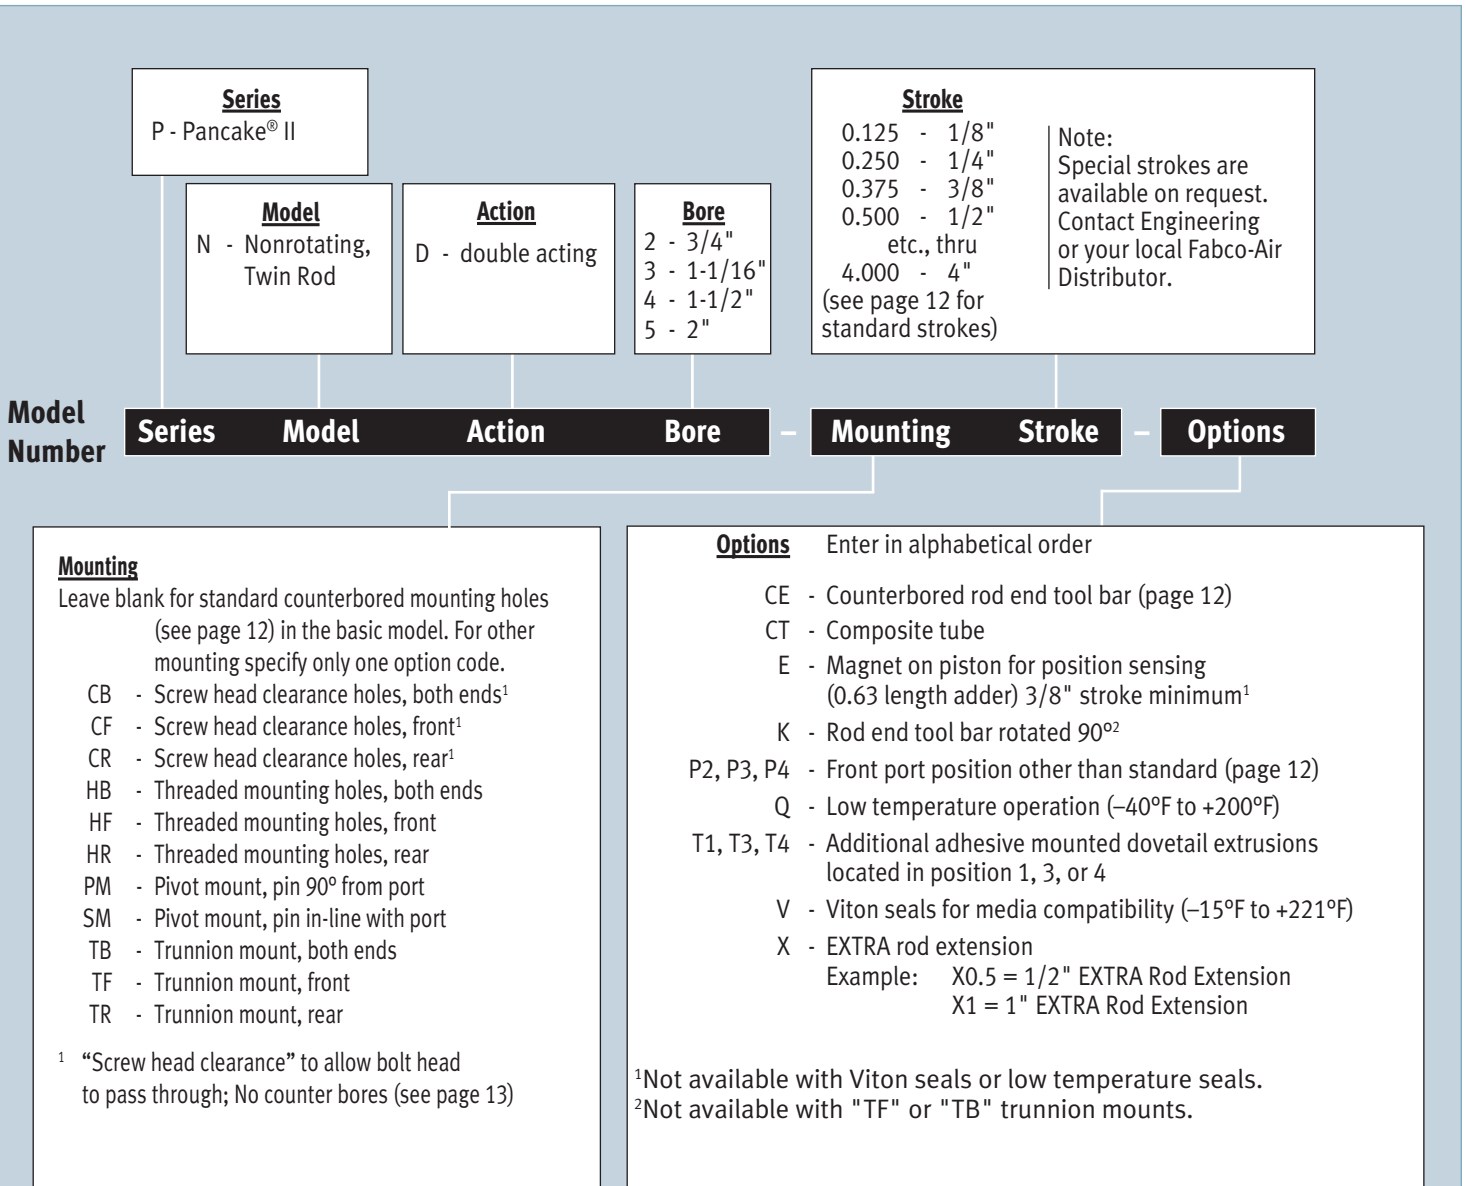

How to Order

1. Specify P, Model, Action and Bore
2. Specify optional Mounting (if required), then Stroke
3. Specify the Options in alphabetical order

Ordering example #1: PND3-PM0.375-CE

This model number specifies a Pancake® II nonrotating, double acting, cylinder with tool bar, 1-1/16" bore, pivot mounting, 3/8" stroke and counterbored rod end tool bar.


Ordering example #2: PND5-2.000

This model number specifies a Pancake® II nonrotating, double acting, cylinder with tool bar, 2" bore, standard counterbored mounting holes, and 2" stroke.

FABCO-AIR Pancake® II Cylinders

Basic Model PND

Twin Rod, Nonrotating
Double Acting

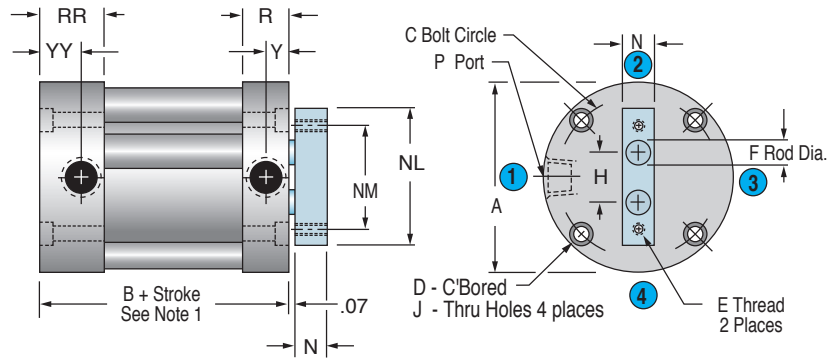


Note 1: Magnetic Position Sensing Length Adder = 0.63
A minimum stroke of 3/8" is required to sense end-of-stroke positions

Standard Strokes – All Models: • 1/8 • 1/4 • 3/8 • 1/2 • 5/8 • 3/4 • 7/8 • 1 • 1-1/4 • 1-1/2 • 1-3/4 • 2 • 2-1/2 • 3 • 3-1/2 • 4
Special strokes available. Contact Engineering or your local Fabco-Air distributor for information.

Counterbored Rod End Tool Bar

Option CE

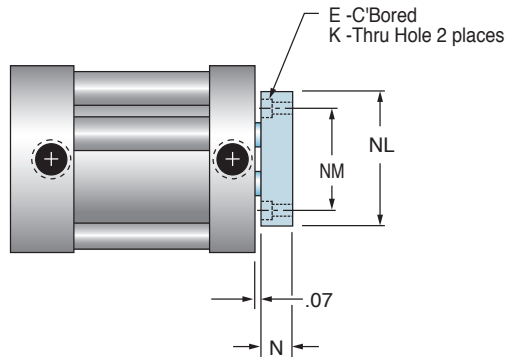

C'Bore Hole Dimensions (inches)

Bore	E C'Bore	K
3/4 (2)	0.24 x 0.15 dp	0.15
1-1/16 (3)	0.29 x 0.18 dp	0.18
1-1/2 (4)	0.40 x 0.27 dp	0.26
2 (5)	0.49 x 0.33 dp	0.33

Dimensions (inches)

Bore	A	B	C	D	E Thread	F	H	J	N	NL	NM	P	R	RR	Y	YY
3/4 (2)	1.49	0.94	1.22	0.24 x 0.15 dp	#6-32 UNC	0.19	0.332	0.15	0.38	1.25	0.88	#10-32 UNF	0.34	0.47	0.14	0.27
1-1/16 (3)	1.99	1.31	1.69	0.24 x 0.15 dp	#8-32 UNC	0.25	0.422	0.15	0.38	1.44	1.06	1/8 NPT	0.50	0.69	0.25	0.44
1-1/2 (4)	2.62	1.31	2.19	0.34 x 0.22 dp	1/4-20 UNC	0.38	0.562	0.20	0.50	2.00	1.50	1/8 NPT	0.50	0.69	0.25	0.44
2 (5)	3.12	1.38	2.69	0.34 x 0.22 dp	5/16-18 UNC	0.50	0.750	0.20	0.63	2.50	1.88	1/8 NPT	0.53	0.72	0.25	0.44

Nonrotating Series PND Dimensions & Options


Seal Kits – Series PND

Options	Kit Numbers by Bore Size			
	3/4"	1-1/16"	1-1/2"	2"
Standard	PN-2-SK	PN-3-SK	PN-4-SK	PN-5-SK
Viton (V)	PN-2-SKV	PN-3-SKV	PN-4-SKV	PN-5-SKV
Low Temperature (Q)	PN-2-SKQ	PN-3-SKQ	PN-4-SKQ	PN-5-SKQ

Mounting Options


Trunnion Mount

Available rear, front or both.
(TF shown solid)

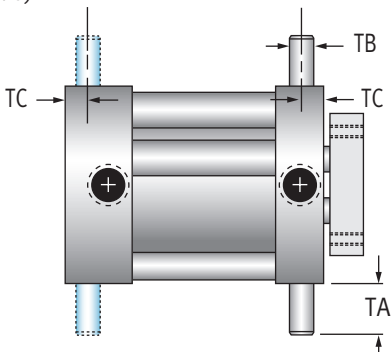


Pivot Mount

Complete with bronze pivot bushing.
Not available as an accessory. (SM shown)

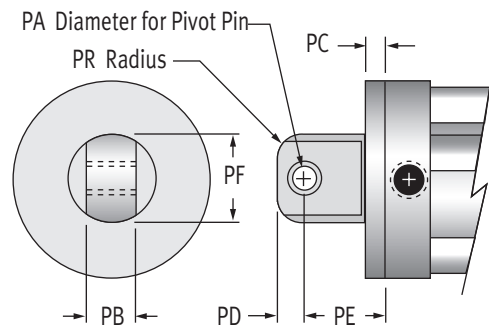


Threaded Mounting Holes

Available either or both ends. (HR shown)

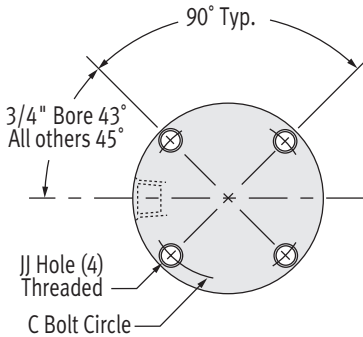

Screw Head Clearance Holes

Available either or both ends.
(CR shown)




Approximate Cylinder Weights (ounces)

Bore	Base	Adder per 1/8 of Stroke
3/4 (2)	3.1	0.1
1-1/16 (3)	7.4	0.5
1-1/2 (4)	14.3	0.7
2 (5)	21.5	0.9

Dimensions (inches)

Bore	C	JJ	PA	PB	PC	PD	PE	PF	PR	SC	TA	TB	TC
3/4 (2)	1.22	#6-32 UNC	0.19	0.38	0.19	0.25	0.75	0.75	0.19	0.23	0.31	0.125	0.17
1-1/16 (3)	1.69	#6-32 UNC	0.19	0.38	0.25	0.25	0.81	0.75	0.19	0.25	0.50	0.250	0.25
1-1/2 (4)	2.19	#10-24 UNC	0.38	0.75	0.25	0.44	1.19	1.38	0.38	0.34	0.50	0.250	0.25
2 (5)	2.69	#10-24 UNC	0.38	0.75	0.31	0.44	1.25	1.38	0.38	0.34	0.50	0.250	0.25

FABCO-AIR Pancake® II Cylinders

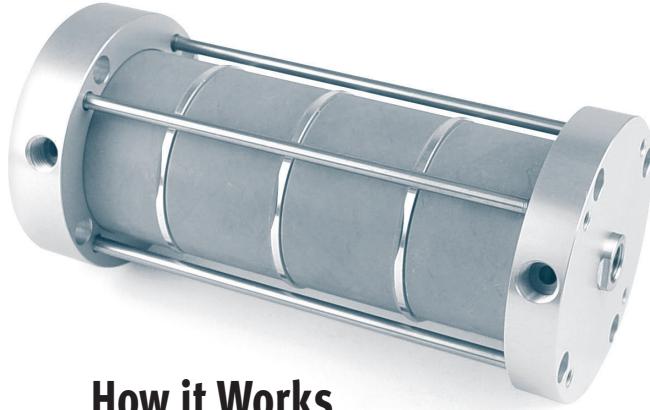

Double acting, single rod end cylinders multiply force output. 3 Bore sizes 2-1/2" thru 4". Strokes to 4" standard.


How it Works

PA Series shown


Fabco-Air attaches multiple pistons to a common shaft and provides internal air passages through the shaft to all pistons. When air pressure is applied to the extend port, all pistons are pressurized simultaneously, enabling tremendous thrust forces to be obtained. (See the handy cylinder sizing guide below for the force multiplying factors.) When air pressure is applied to the retract port only one piston is pressurized.

NOTE: 1) Series PB is made with multiple retract and single extend cylinder action for applications requiring high pulling force. See "How to Order" and "Sizing Guide".

2) Additional retract stages are offered in the PA Series (multiple extend and single retract) with the use of ported baffles. Contact engineering for application and information. Add 0.50" length to dimension B* for each ported baffle. See "Options" R2, R3, R4 listed on page 15.

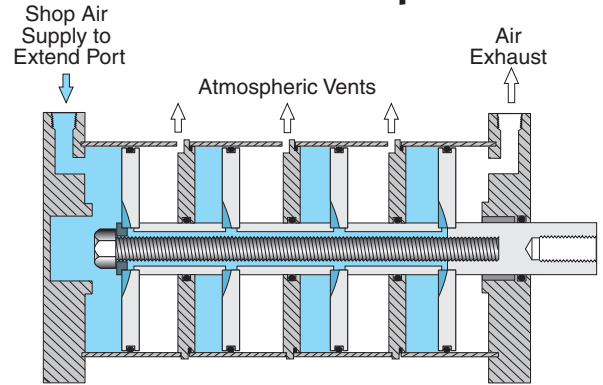

Extend Port - Air supplied to all pistons

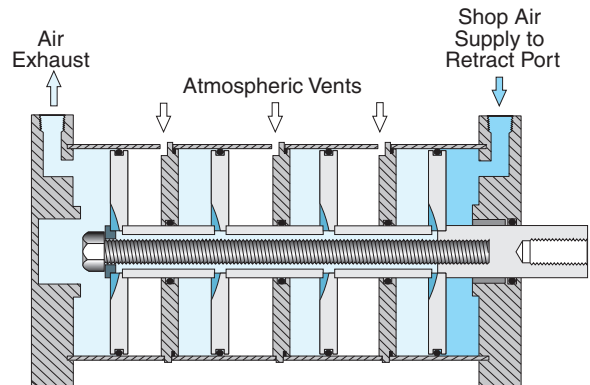

Retract Port - Air supplied to front piston only

Ratings – Standard Units all Series

- Body..... High strength aluminum alloy
- Heads..... Clear anodized aluminum alloy
- Tie Bolts Stainless steel
- Rod..... Chrome plated stainless steel
- Piston..... Aluminum alloy
- Rod end..... Female thread with wrench flats
- Ports..... Position #1
- Seals Internally lubricated Buna-N
- Lubrication Magnalube®-G
- Rod bushing PTFE composite bearing
- Stroke tolerance $\pm 1/64$ " per stage
- Media Air
- Pressure rating, maximum..... 200 psi
- Minimum recommended operating pressure 15 psi
- Temperature rating
Cylinder -25° to $+221^{\circ}$ F
(-32° to $+105^{\circ}$ C)
- Temperature rating
Electronic sensors -4° to $+176^{\circ}$ F
(-20° to $+80^{\circ}$ C)

Cylinder Sizing Guide

Bore	Bore Model Designation	Extend Piston Area (in ²)			Retract Piston Area (in ²)
		PA2	PA3	PA4	
2-1/2	6	9.4	13.8	18.3	4.5
3	7	13.5	20.0	26.5	6.5
4	8	24.3	36.1	47.9	11.8

Bore	Bore Model Designation	Retract Piston Area (in ²)			Extend Piston Area (in ²)
		PB2	PB3	PB4	
2-1/2	6	8.9	13.4	17.9	4.9
3	7	12.9	19.4	25.9	7.1
4	8	23.6	35.3	47.1	12.6

Please visit <http://portal.fabco-air.com/configure.php> for current pricing. Specifications and prices subject to change without notice or incurring obligation

How to Order

Series

P - Pancake® II

Multi-Power® Model and Action

A2 -2 stage extend, single stage retract
 A3 -3 stage extend, single stage retract
 A4 -4 stage extend, single stage retract
 B2 -single stage extend, 2 stage retract
 B3 -single stage extend, 3 stage retract
 B4 -single stage extend, 4 stage retract

Bore

6- 2-1/2"
 7- 3"
 8- 4"

Stroke

0.125 - 1/8"
 0.250 - 1/4"
 0.375 - 3/8"
 0.500 - 1/2"
 etc., thru
 4.000 - 4"
 (see page 16 for standard strokes)

Note:
 Special strokes are available on request. Contact Engineering or your local Fabco-Air Distributor.

Model Number

Series

Model

Action

Bore

Mounting

Stroke

Options

Mounting

Leave blank for standard counterbored mounting holes (see page 16) in the basic model. For other mounting specify only one option code.

CB - Screw head clearance holes, both ends¹
 CF - Screw head clearance holes, front¹
 CR - Screw head clearance holes, rear¹
 HB - Threaded mounting holes, both ends
 HF - Threaded mounting holes, front
 HR - Threaded mounting holes, rear

¹ "Screw head clearance" to allow bolt head to pass through; No counter bores (See page 17)

Options

Enter in alphabetical order

CT - Composite tube
 E - Magnet on piston for position sensing
 (see length adders page 17) 3/8" stroke minimum¹
 P2, P3, P4 - Front port position other than standard (page 16)
 P6, P7, P8 - Rear port position other than standard (page 16)
 Q - Low temperature operation (-40°F to +200°F)
 R2, R3, R4 - Total number of retract stages; available Series PA only
 (see length adders page 17)
 TCF - Coarse female rod thread, dimension E (page 16)
 TCM - Male rod end with coarse thread (page 17)
 TFM - Male rod end with fine thread (page 17)
 TN - Non-threaded rod
 T1, T3, T4 - Additional adhesive mounted dovetail extrusions located in position 1, 3, or 4
 V - Viton seals for media compatibility (-15°F to +221°F)
 W - Rod wiper, Buna N only (page 17)
 X - EXTRA rod extension
 Example: X0.5 = 1/2" EXTRA Rod Extension
 X1 = 1" EXTRA Rod Extension

¹ Not available with Viton seals or low temperature seals.

How to Order

1. Specify P, Model, Action and Bore
2. Specify optional Mounting (if required), then Stroke
3. Specify the Options in alphabetical order


Ordering example: PA37-HB1.000-TCFV

This model number specifies a Multi-Power®, 3 stage extend, 1 stage retract, 3" bore cylinder, threaded mounting holes on both ends, 1" stroke, with coarse female rod thread and Viton seals.

FABCO-AIR Pancake® II Cylinders


Model PA2 or PB2

Standard Strokes – All Models: • 1/8 • 1/4 • 3/8 • 1/2 • 5/8 • 3/4 • 7/8 • 1 • 1-1/4 • 1-1/2 • 1-3/4 • 2 • 2-1/2 • 3 • 3-1/2 • 4
 4 Special strokes available on request. Contact Engineering or your local Fabco-Air Distributor

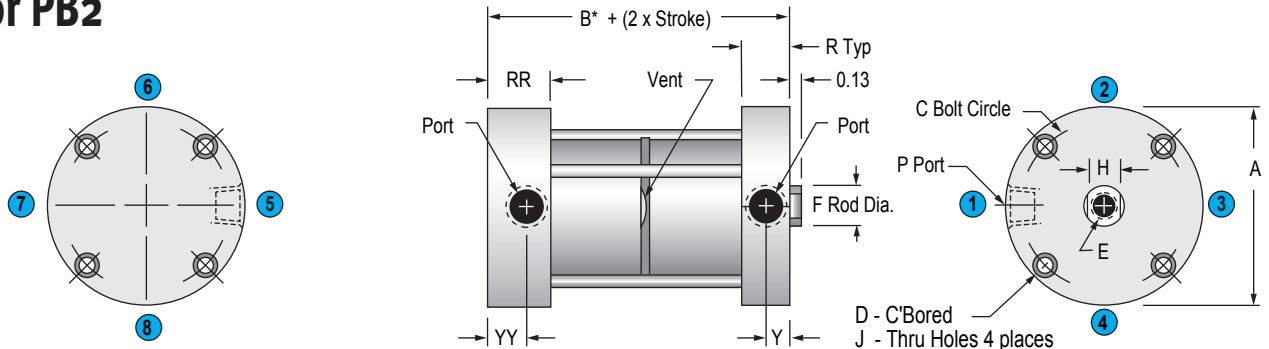


Model PA3 or PB3

Standard Strokes – All Models: • 1/8 • 1/4 • 3/8 • 1/2 • 5/8 • 3/4 • 7/8 • 1 • 1-1/4 • 1-1/2 • 1-3/4 • 2 • 2-1/2 • 3 • 3-1/2 • 4
 4 Special strokes available on request. Contact Engineering or your local Fabco-Air Distributor

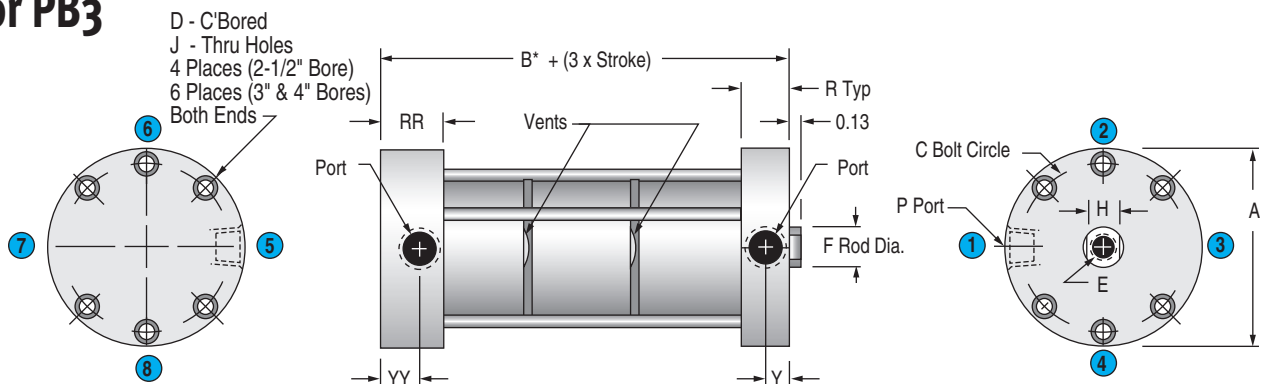

Model PA4 or PB4

Standard Strokes – All Models: • 1/8 • 1/4 • 3/8 • 1/2 • 5/8 • 3/4 • 7/8 • 1 • 1-1/4 • 1-1/2 • 1-3/4 • 2 • 2-1/2 • 3 • 3-1/2 • 4
 4 Special strokes available on request. Contact Engineering or your local Fabco-Air Distributor

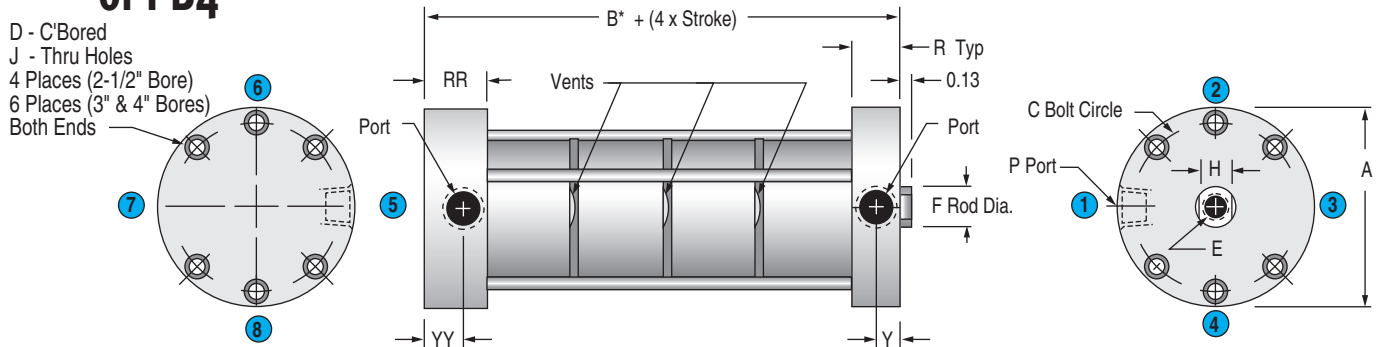

***Dimension "B" for Strokes .125, .188, and .250 (inches)**

Bore	.125 Stroke			.188 Stroke			.250 Stroke		
	PA2 or PB2	PA3 or PB3	PA4 or PB4	PA2 or PB2	PA3 or PB3	PA4 or PB4	PA2 or PB2	PA3 or PB2	PA4 or PB2
2-1/2 (6)	2.65	3.64	4.63	2.71	3.76	4.81	2.77	3.87	4.97
3 (7)	2.75	3.77	4.79	2.81	3.90	4.98	2.88	4.01	5.15
4 (8)	3.38	4.61	5.85	3.44	4.74	6.04	3.53	4.89	6.24

Dimensions (inches)

Bore	A	B* (strokes over .250)			C	D C'Bore	E Female Thread		E Depth for Stroke Range		F	H	J	P	R	RR	Y	YY
		PA2 or PB2	PA3 or PB3	PA4 or PB4			E Standard	E Course	1/8 - 1/2	5/8 +								
		4.02	4.18	5.27														
2-1/2 (6)	3.75	2.29	3.15	4.02	3.25	0.40 x 0.27 dp	1/2-20 UNF	1/2-13 UNC	0.42-0.70	0.70	0.75	0.63	0.26	1/4 NPT	0.66	0.91	0.33	0.58
3 (7)	4.25	2.39	3.28	4.18	3.78	0.40 x 0.27 dp	5/8-18 UNF	5/8-11 UNC	0.45-0.73	0.73	0.88	0.75	0.26	1/4 NPT	0.69	0.94	0.33	0.58
4 (8)	5.50	3.04	4.15	5.27	4.94	0.49 x 0.33 dp	3/4-16 UNF	3/4-10 UNC	0.40-0.70	0.80	1.00	0.88	0.33	3/8 NPT	0.84	1.22	0.42	0.80


Seal Kits - Multi-Power® Series PA & PB

Options	Kit Numbers by Stages and Bore Size								
	PM2-2 1/2"	PM2-3"	PM2-4"	PM3-2 1/2"	PM3-3"	PM3-4"	PM4-2 1/2"	PM4-3"	PM4-4"
Standard	PM2-6-SK	PM2-7-SK	PM2-8-SK	PM3-6-SK	PM3-7-SK	PM3-8-SK	PM4-6-SK	PM4-7-SK	PM4-8-SK
Viton (V)	PM2-6-SKV	PM2-7-SKV	PM2-8-SKV	PM3-6-SKV	PM3-7-SKV	PM3-8-SKV	PM4-6-SKV	PM4-7-SKV	PM4-8-SKV
Low Temperature (Q)	PM2-6-SKQ	PM2-7-SKQ	PM2-8-SKQ	PM3-6-SKQ	PM3-7-SKQ	PM3-8-SKQ	PM4-6-SKQ	PM4-7-SKQ	PM4-8-SKQ

Mounting Options


Threaded Mounting Holes

Available either or both ends. (HR shown)

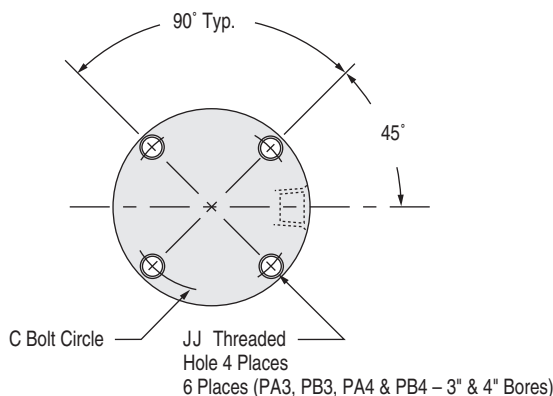


Screw Head Clearance Holes

Available either or both ends. (CR shown)

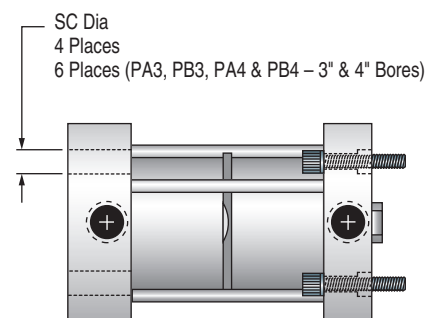


Model Options

Male Rod Ends (Option TCM or Option TFM) (Model PA2 shown)

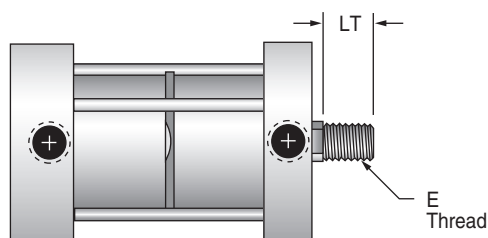

Rod Wiper (Option W)

Buna-N only. (Model PA2 shown)

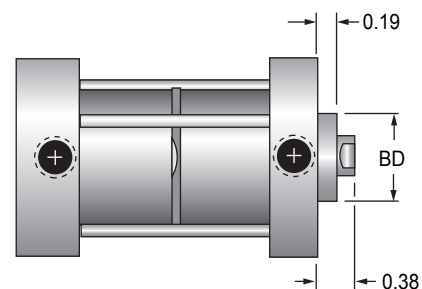

Approximate Cylinder Weights (ounces)

Bore	PA2, PB2		PA3, PB3		PA4, PB4	
	Base	Adder per 1/8 Stroke	Base	Adder per 1/8 Stroke	Base	Adder per 1/8 Stroke
2-1/2 (6)	37.2	1.2	53.3	1.8	69.4	2.4
3 (7)	49.9	1.6	71.0	2.4	92.1	3.2
4 (8)	93.1	2.0	133.8	3.0	174.5	4.0

Dimensions (inches)

Bore	BD	C	JJ	E Male Thread		LT	SC
				TCM (Coarse)	TFM (Fine)		
2-1/2 (6)	1.13	3.25	1/4 - 20 UNC	1/2-13 UNC	1/2-20 UNF	0.63	0.41
3 (7)	1.25	3.78	1/4 - 20 UNC	5/8-11 UNC	5/8-18 UNF	0.75	0.41
4 (8)	1.38	4.94	5/16 - 18 UNC	3/4-10 UNC	3/4-16 UNF	0.75	0.50

Length Adder for Options (inches)

Bore	Series	Magnetic Position Sensing* (E)	Ported Baffle	
			Retract Stages	Port Size
2-1/2	PA2, PB2	0.88	R2	0.50 1/4 NPT
	PA3, PB3		R3	1.00 1/4 NPT
	PA4, PB4		R4	1.50 1/4 NPT
3	PA2, PB2	0.88	R2	0.50 1/4 NPT
	PA3, PB3		R3	1.00 1/4 NPT
	PA4, PB4		R4	1.50 1/4 NPT
4	PA2, PB2	0.88	R2	0.50 1/4 NPT
	PA3, PB3		R3	1.00 1/4 NPT
	PA4, PB4		R4	1.50 1/4 NPT

* 1) A minimum stroke of 3/8" is required to sense end-of-stroke positions.
2) Magnet is applied to front piston.

FABCO-AIR Pancake® II Cylinders



**Double acting, single rod end
Cylinder provides 3 positions
8 Bore sizes 1/2" thru 4"
Strokes to 4" standard**

Other multi-position cylinders (4 position, 5 position, etc.) are available as specials. Contact Engineering or your local Fabco-Air distributor for more information.


Ratings – Standard Units all Series

- Body.....High strength aluminum alloy
- Heads..... Clear anodized aluminum alloy
- Tie Bolts..... Stainless steel
- Rod.....Chrome plated stainless steel
- Piston..... Aluminum alloy
- Rod end..... Female thread & wrench flats
- Ports..... Position #1
- Seals..... Internally lubricated Buna-N
- Lubrication..... Magnalube®-G
- Rod bushing..... PTFE composite bearing
- Stroke tolerance..... $\pm 1/64$ " per stroke
- Media..... Air
- Pressure rating, maximum..... 200 psi
- Minimum recommended operating pressure..... 15 psi
- Temperature rating Cylinder..... -25° to +221°F (-32° to +105°C)
- Temperature rating Electronic sensors..... -4° to +176°F (-20° to +80°C)

Cylinder Sizing Guide


Bore Diameter (inch)	1/2	3/4	1-1/16	1-1/2	2	2 1/2	3	4
Rod Diameter (inch)	0.25	0.31	0.50	0.63	0.75	0.75	0.88	1.00
Rod Area (in ²)	0.05	0.08	0.19	0.31	0.44	0.44	0.60	0.79
Push Area (in ²)	0.20	0.44	0.88	1.76	3.14	4.91	7.07	12.57
Pull Area (in ²)	0.15	0.36	0.69	1.45	2.66	4.47	6.47	11.78

How it Works

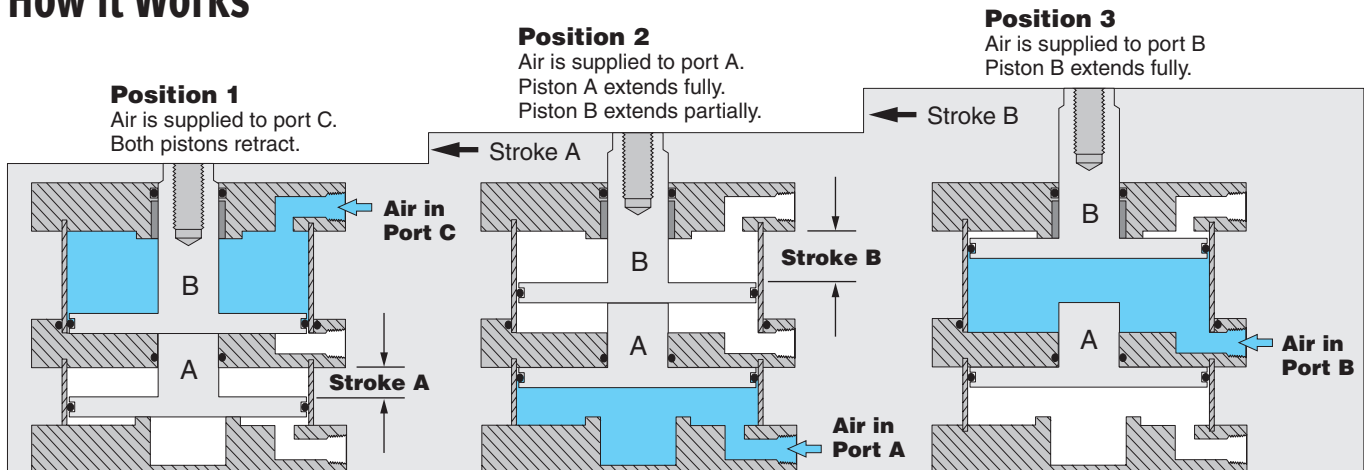

Please visit <http://portal.fabco-air.com/configure.php> for current pricing.
Specifications and prices subject to change without notice or incurring obligation

How to Order

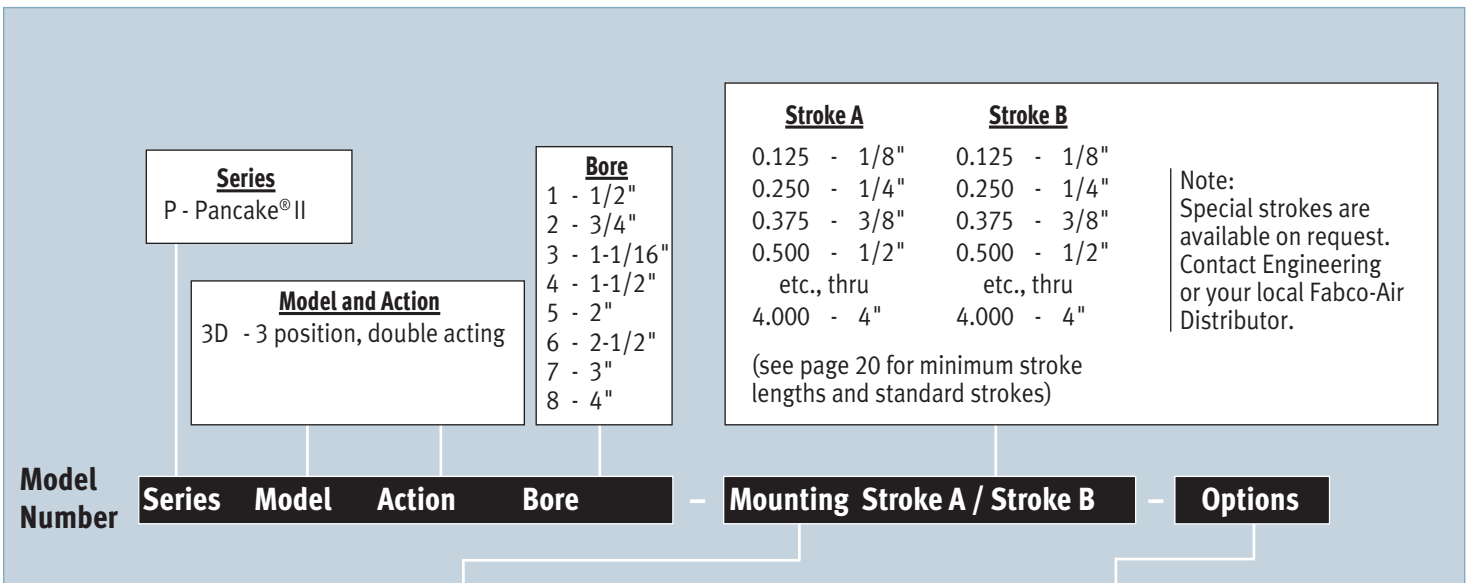

Series
P - Pancake® II

Model and Action
3D - 3 position, double acting

Bore
1 - 1/2"
2 - 3/4"
3 - 1-1/16"
4 - 1-1/2"
5 - 2"
6 - 2-1/2"
7 - 3"
8 - 4"

Stroke A	Stroke B
0.125 - 1/8"	0.125 - 1/8"
0.250 - 1/4"	0.250 - 1/4"
0.375 - 3/8"	0.375 - 3/8"
0.500 - 1/2"	0.500 - 1/2"
etc., thru	etc., thru
4.000 - 4"	4.000 - 4"

(see page 20 for minimum stroke lengths and standard strokes)

Note:
Special strokes are available on request. Contact Engineering or your local Fabco-Air Distributor.

Model Number

Series Model Action Bore - Mounting Stroke A / Stroke B - Options

Mounting

Leave blank for standard counterbored mounting holes (see page 20) in the basic model. For other mounting specify only one option code.

- CB - Screw head clearance holes, both ends¹
- CF - Screw head clearance holes, front¹
- CR - Screw head clearance holes, rear¹
- HB - Threaded mounting holes, both ends
- HF - Threaded mounting holes, front
- HR - Threaded mounting holes, rear
- PM - Pivot mount, pin 90° from port
- SM - Pivot mount, pin in-line with port

¹ "Screw head clearance" to allow bolt head to pass through; No counter bores (see page 21)

Options Enter in alphabetical order

- CT - Composite tube
- E - Magnet on rod end piston for position sensing (see length adders page 20) 3/8" stroke minimum¹
- L - Low friction seals (see length adders page 20)
- P2, P3, P4 - Front port position other than standard (page 20)²
- P6, P7, P8 - Rear port position other than standard (page 20)²
- Q - Low temperature operation (-40°F to +200°F)
- TCF - Coarse female rod thread, dimension E (page 20)
- TCM - Male rod end with coarse thread (page 20)
- TFM - Male rod end with fine thread (page 20)
- TN - Non-threaded rod
- T1, T3, T4 - Additional adhesive mounted dovetail extrusions located in position 1, 3, or 4
- V - Viton seals for media compatibility (-15°F to +221°F)
- W - Rod wiper, Buna N only (page 20)
- X - EXTRA rod extension
Example: X0.5 = 1/2" EXTRA Rod Extension
X1 = 1" EXTRA Rod Extension

¹ Not available with Viton seals or low temperature seals.
² P2, P4, P6 and P8 not available in 1/2" bore.


How to Order

1. Specify P, Model, Action and Bore
2. Specify optional Mounting (if required), then Stroke
3. Specify the Options desired

Ordering example: P3D5-CR0.375/2.000-TCM
This model number specifies a 3-position, double acting cylinder, 2" bore, screw clearance holes at rear, 3/8" stroke A, 2" stroke B, and male rod end with coarse thread.

FABCO-AIR Pancake® II Cylinders

Basic Model

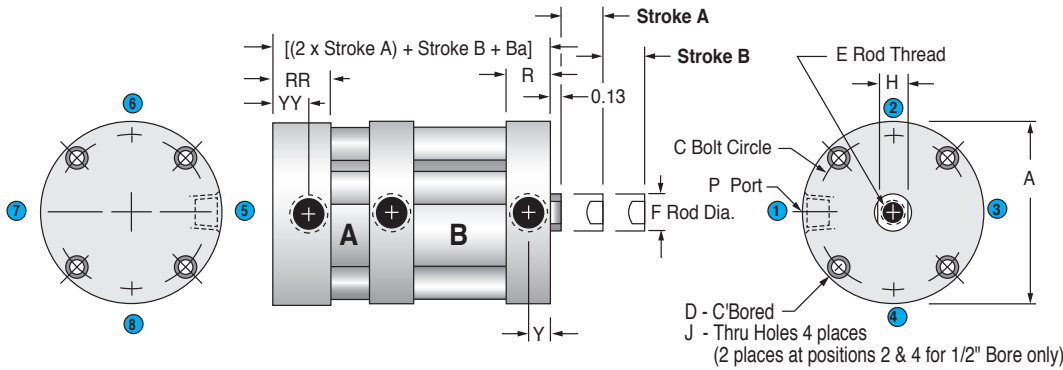

Minimum Stroke*	
Bore	Base Model Stroke A
1/2 (1)	0.19
3/4 (2)	0.19
1-1/16 (3)	0.25
1-1/2 (4)	0.25
2 (5)	0.25
2-1/2 (6)	0.38
3 (7)	0.38
4 (8)	0.34


*Note:
 1) No minimum for stroke B.
 2) No minimum for stroke A or B with Low Friction Option - L

Standard Strokes – • 1/8 • 1/4 • 3/8 • 1/2 • 5/8 • 3/4 • 7/8 • 1 • 1-1/4 • 1-1/2 • 1-3/4 • 2 • 2-1/2 • 3 • 3-1/2 • 4
 Special strokes available on request. Contact Engineering or your local Fabco-Air Distributor


Model Options

Rod Wiper (Option W)

Buna-N only

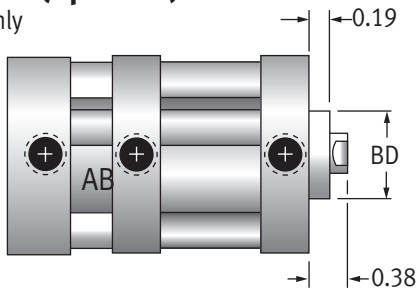

Male Rod Ends (Option TCF or TFM)

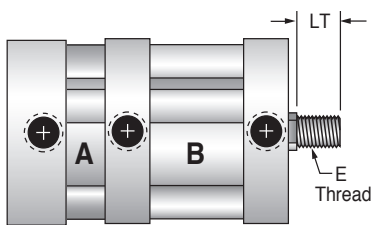

Deviations from Standard Dimensions (Options L, E)

Bore	Length Adder (inches)		
	Low Friction Seals (L)	Magnetic Position Sensing* (E)	Low Friction Seals & Magnetic Position Sensing* (EL)
1/2 (1)	0.50	0.88	1.13
3/4 (2)	0.50	0.88	1.13
1-1/16 (3)	0.75	0.88	1.25
1-1/2 (4)	0.75	0.88	1.25
2 (5)	0.75	0.88	1.25
2-1/2 (6)	0.75	0.88	1.25
3 (7)	1.00	0.88	1.38
4 (8)	1.00	0.88	1.38

*1) A minimum stroke of 3/8" is required to sense end-of-stroke positions.
 2) Magnet is applied to piston of stroke B.

Dimensions (inches)

Bore	A	Ba	BD	C	D C'Bore	E Female Thread		E Depth for Stroke Range		F	H	J	LT	P	R	RR	Y	YY
						E Standard	E Course	1/8-1/2	5/8+									
1/2 (1)	1.12	1.14	0.56	0.88	0.20 x 0.13 dp	#8-32 UNC	N/A	0.30-0.46	0.46	0.25	0.22	0.13	0.38	#10-32 UNF	0.34	0.47	0.14	0.27
3/4 (2)	1.49	1.14	0.69	1.22	0.24 x 0.15 dp	#10-32 UNF	#10-24 UNC	0.30-0.46	0.46	0.31	0.25	0.15	0.38	#10-32 UNF	0.34	0.47	0.14	0.27
1-1/16 (3)	1.99	1.67	0.88	1.69	0.24 x 0.15 dp	5/16-24 UNF	5/16-18 UNC	0.37-0.63	0.70	0.50	0.44	0.15	0.50	1/8 NPT	0.50	0.69	0.25	0.44
1-1/2 (4)	2.62	1.70	1.00	2.19	0.34 x 0.22 dp	3/8-24 UNF	3/8-16 UNC	0.37-0.70	0.70	0.63	0.50	0.20	0.50	1/8 NPT	0.50	0.69	0.25	0.44
2 (5)	3.12	1.80	1.13	2.69	0.34 x 0.22 dp	1/2-20 UNF	1/2-13 UNC	0.30-0.63	0.70	0.75	0.63	0.20	0.63	1/8 NPT	0.53	0.72	0.25	0.44
2-1/2 (6)	3.75	2.25	1.13	3.25	0.40 x 0.27 dp	1/2-20 UNF	1/2-13 UNC	0.42-0.70	0.70	0.75	0.63	0.26	0.63	1/4 NPT	0.66	0.91	0.33	0.58
3 (7)	4.25	2.34	1.25	3.78	0.40 x 0.27 dp	5/8-18 UNF	5/8-11 UNC	0.45-0.73	0.73	0.88	0.75	0.26	0.75	1/4 NPT	0.69	0.94	0.33	0.58
4 (8)	5.50	3.00	1.38	4.94	0.49 x 0.33 dp	3/4-16 UNF	3/4-10 UNC	0.40-0.70	0.80	1.00	0.88	0.33	0.75	3/8 NPT	0.84	1.22	0.42	0.80


Seal Kits - Multi-Position Series P3D

Options	Kit Numbers by Bore Size							
	1/2"	3/4"	1-1/16"	1-1/2"	2"	2-1/2"	3"	4"
Standard	P3-1-SK	P3-2-SK	P3-3-SK	P3-4-SK	P3-5-SK	P3-6-SK	P3-7-SK	P3-8-SK
Viton (V)	P3-1-SKV	P3-2-SKV	P3-3-SKV	P3-4-SKV	P3-5-SKV	P3-6-SKV	P3-7-SKV	P3-8-SKV
Low Temperature (Q)	P3-1-SKQ	P3-2-SKQ	P3-3-SKQ	P3-4-SKQ	P3-5-SKQ	P3-6-SKQ	P3-7-SKQ	P3-8-SKQ
Low Friction (L)	P3-1-SKL	P3-2-SKL	P3-3-SKL	P3-4-SKL	P3-5-SKL	P3-6-SKL	P3-7-SKL	P3-8-SKL
Low Friction-Viton (L, V)	P3-1-SKLV	P3-2-SKLV	P3-3-SKLV	P3-4-SKLV	P3-5-SKLV	P3-6-SKLV	P3-7-SKLV	P3-8-SKLV
Low Friction-Low Temperature (L, Q)	P3-1-SKLQ	P3-2-SKLQ	P3-3-SKLQ	P3-4-SKLQ	P3-5-SKLQ	P3-6-SKLQ	P3-7-SKLQ	P3-8-SKLQ

Mounting Options


Threaded Mounting Holes

Available either or both ends. (HR shown)

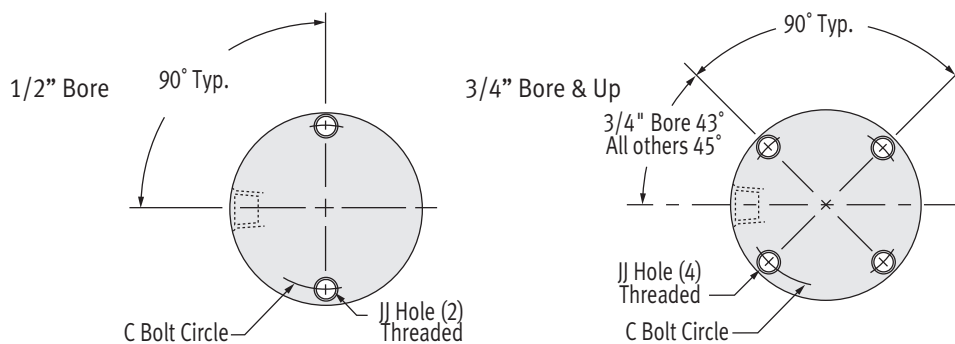


Screw Head Clearance Holes

Available either or both ends. (CR shown)
Screw head clearance holes are standard on all center sections.

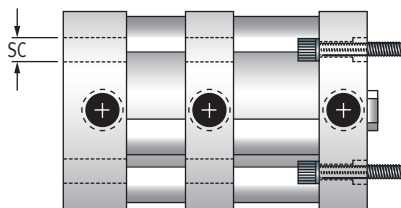

Pivot Mount

Complete with bronze pivot bushing. (SM shown)
Not available as an accessory

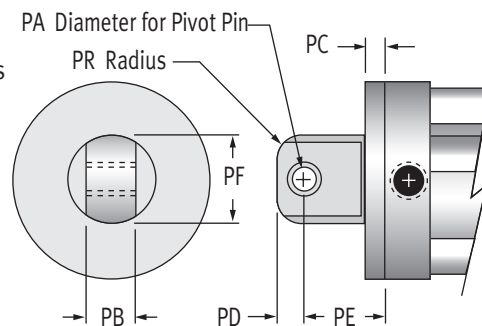

Approximate Cylinder Weights (ounces)

Bore	Base	Adder per 1/8 of Stroke
1/2 (1)	3.3	0.16
3/4 (2)	4.5	0.2
1-1/16 (3)	9.9	0.6
1-1/2 (4)	18.7	0.8
2 (5)	24.5	1.0
2-1/2 (6)	41.3	1.2
3 (7)	52.9	1.6
4 (8)	102.7	2.0


Dimensions (inches)

Bore	C	JJ	PA	PB	PC	PD	PE	PF	PR	SC
1/2 (1)	0.88	#4-40 UNC	0.19	0.38	0.19	0.25	0.75	0.63	0.19	0.17
3/4 (2)	1.22	#6-32 UNC	0.19	0.38	0.19	0.25	0.75	0.75	0.19	0.23
1-1/16 (3)	1.69	#6-32 UNC	0.19	0.38	0.25	0.25	0.81	0.75	0.19	0.25
1-1/2 (4)	2.19	#10-24 UNC	0.38	0.75	0.25	0.44	1.19	1.38	0.38	0.34
2 (5)	2.69	#10-24 UNC	0.38	0.75	0.31	0.44	1.25	1.38	0.38	0.34
2-1/2 (6)	3.25	1/4-20 UNC	0.38	0.75	0.38	0.44	1.31	1.38	0.38	0.41
3 (7)	3.78	1/4-20 UNC	0.63	1.00	0.38	0.56	1.69	1.88	0.38	0.41
4 (8)	4.94	5/16-18 UNC	0.63	1.00	0.44	0.56	1.75	1.88	0.38	0.50

Selection Guide				
Accessory	Standard Series	PND Series	Multi-Power Series	P3D Series
Clevis Bracket	✓	✓	N/A	✓
Trunnion Bracket	✓	✓	N/A	N/A
Rod Eye	✓	N/A	✓	✓

Clevis Bracket

Anodized aluminum alloy
 Chrome plated steel pin included

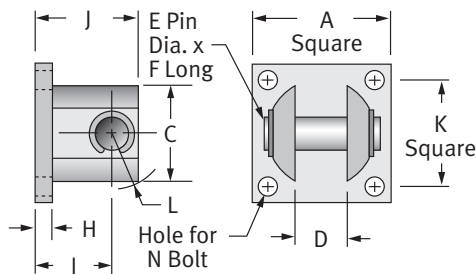


The bracket is intended for mounting with either a rod pivot or pivot mount; it is not intended to mount directly with the rear cylinder head.

Dimensions (inches)												
Kit No.	Bore	A	C	D	E	F	H	I	J	K	L	N
CB-3	1/2 (1)	1.00	0.71	0.39	0.187	0.93	0.16	0.56	0.78	0.75	0.42	#6
	3/4 (2)											
	1-1/16 (3)											
CB-6	1-1/2 (4)	1.75	1.37	0.75	0.375	1.63	0.22	0.94	1.34	1.38	0.80	#10
	2 (5)											
	2-1/2 (6)											
CB-8	3 (7)	2.50	2.10	1.00	0.625	2.42	0.25	1.25	1.81	2.00	1.19	1/4
	4 (8)											

Trunnion Bracket (pair)


Anodized aluminum alloy
 complete with bronze pivot bushings

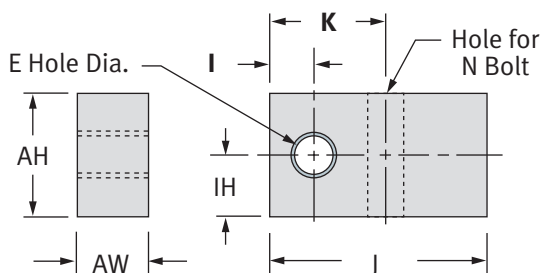

Dimensions (inches)									
Kit No.	Bore	AH	AW	E	I	IH	J	K	N
TB-2	3/4 (2)	0.63	0.31	0.126	0.22	0.30	1.12	0.56	#10
TB-5	1-1/16 (3)	0.88	0.50	0.251	0.31	0.38	1.50	0.81	1/4
	1-1/2 (4)								
TB-7	2-1/2 (6)	1.00	0.63	0.313	0.38	0.45	1.63	0.94	5/16
	3 (7)								
TB-8	4 (8)	1.25	0.75	0.376	0.44	0.55	1.88	1.06	3/8


Rod Eye

Steel with bronze pivot bushing and nut

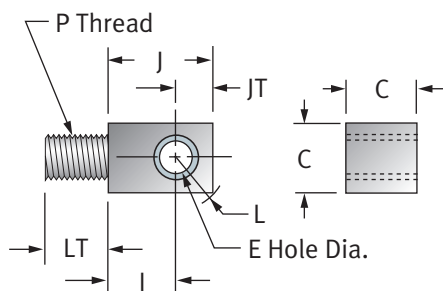


Dimensions (inches)									
Kit No.	Bore	C	E	I	J	JT	L	LT	P
RE-1	1/2 (1)	0.38	0.187	0.47	0.72	0.25	0.32	0.38	#8-32 UNC
RE-2	3/4 (2)	0.38	0.187	0.47	0.72	0.25	0.32	0.38	#10-32 UNF
RE-3	1-1/16 (3)	0.38	0.187	0.47	0.72	0.25	0.32	0.63	5/16-24 UNF
RE-4	1-1/2 (4)	0.75	0.375	0.72	1.16	0.44	0.58	0.63	3/8-24 UNF
RE-6	2 (5)	0.75	0.375	0.72	1.16	0.44	0.58	0.75	1/2-20 UNF
	2-1/2 (6)								
RE-7	3 (7)	1.00	0.625	1.00	1.63	0.63	0.80	0.88	5/8-18 UNF
RE-8	4 (8)	1.00	0.625	1.00	1.63	0.63	0.80	0.88	3/4-16 UNF

Sensor Specifications & Ordering Information

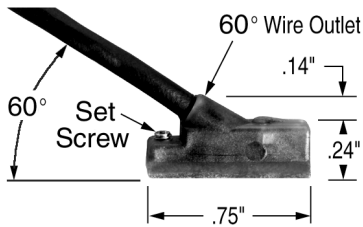


- Encased in a plastic housing, dovetail style electronic sensors are corrosion resistant. 60° wire outlet allows close mounting.
- Method of mounting:
Tie bolt spacer mounted clamps (Option -E)
- Order sensors separately from the table below

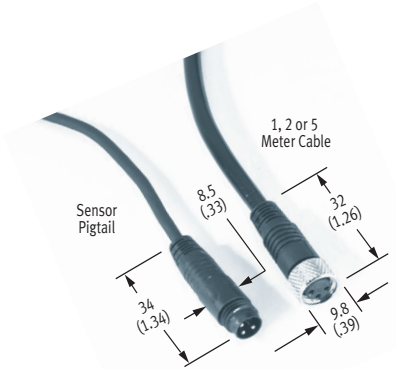

Ordering Guide – Dovetail Style Magnetic Sensor with LED				Sensor Temperature Range -20° to +80° C (-4° to +176° F)	Female Cordsets for Quick Disconnect								
Sensor Type	Prewired 9 ft. Part No.	Quick Disconnect Part No.*	Wire Leads	Electrical Characteristics									
Electronic	949-000-031	949-000-331	3	Sourcing PNP 6-24 VDC, 0.20 Amp Max current, 0.5 Voltage Drop	<table border="1"> <thead> <tr> <th>Length</th> <th>Part No.</th> </tr> </thead> <tbody> <tr> <td>1 Meter</td> <td>CFC-1M</td> </tr> <tr> <td>2 Meters</td> <td>CFC-2M</td> </tr> <tr> <td>5 Meters</td> <td>CFC-5M</td> </tr> </tbody> </table>	Length	Part No.	1 Meter	CFC-1M	2 Meters	CFC-2M	5 Meters	CFC-5M
Length	Part No.												
1 Meter	CFC-1M												
2 Meters	CFC-2M												
5 Meters	CFC-5M												
Electronic	949-000-032	949-000-332	3	Sinking NPN 6-24 VDC, 0.20 Amp Max current, 0.5 Voltage Drop									

Note*: Quick disconnect styles are supplied with 6 inch pigtail with male connector. Order female cordsets separately.

Option -E Magnet on piston – use spacer mounted clamps

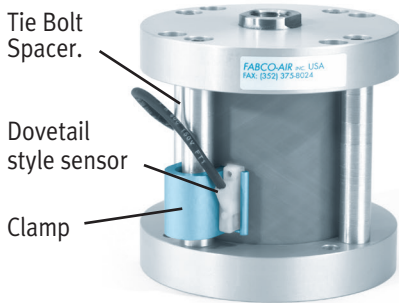

Order clamps and sensors separately

To apply dovetail style sensors first locate clamp in rough position on any of the tie bolt spacers or tie rods and lock it in place with the set screw.


Next, make fine adjustment by sliding the sensor within the clamp and lock in place with its set screw.

Clamp Selection Guide for Standard, Twin Rod & 3-Position Series						
Kit No.	SC-1	SC-2	SC-3	SC-5	SC-7	SC-8
To Fit Bore	1/2	3/4	1-1/16	1-1/2 & 2	2-1/2 & 3	4
Clamp Selection Guide for MultiPower® Series						
Kit No.	900-G00-000					
To Fit Bore	All bore sizes					


Fabco-Air Product Catalog Library



NFPA Interchangeable Air Cylinders - Catalog # NF-6



F-Series Round Body Cylinders Catalog SSB-03




Square Pancake® II Air Cylinders Catalog # SqPan2




H-Series Round Body Cylinders Catalog # HKC-16




OEM - NFPA Air Cylinders Catalog # FFCQN-OEM



Twin Rod, Non-Rotating Air Cylinders - Catalog # FDF-09 and Catalog # FDXS-09



Linear Slides - 6 Families Catalog # LS-03



Pneumatic Grippers, Parallel Jaw and Angular Motion - Catalog # GR-8



Pneumatic Angular Grippers Catalog # FKA-09




ISO 6432 Cylinders Catalog # FAE-09




Multi-Power® Air Presses Catalog # FP16



FJS Series Compact Cylinder



Swing Clamps Catalog # SC-DB04




Manifold Solenoid Valves Catalog # FVS.Y-09



ISO 6431 Cylinders Catalog # FAQR-09




Modular Air Preparation System - FRLs Catalog # FRL-06



Stopper Cylinders Catalog # ST-SC



Swing Clamps, Pneumatic & Hydraulic Catalog # FML.H



Guided Motion Air Cylinders Catalog # FGM-10



Air Slide Tables Catalog # FGXS-10